




SCS

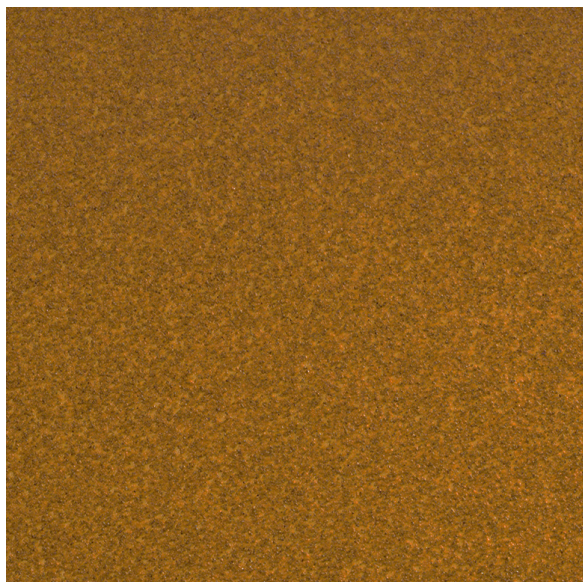

COLOR	Yellow
BACKING	D weight P40 - P120 C weight P150 - P2000
GRAIN	Aluminum Oxide
COATING	Extra Open
BONDING TYPE	Resin/Resin
TOP COAT	Stearate
PRODUCTION WIDTH	1650mm - 65"

FORMS AVAILABLE




WORKING PROCESSES



PRODUCTIVE SECTORS



GRIT RANGE from P60 to P3000 (grit 50 and 360 on request)

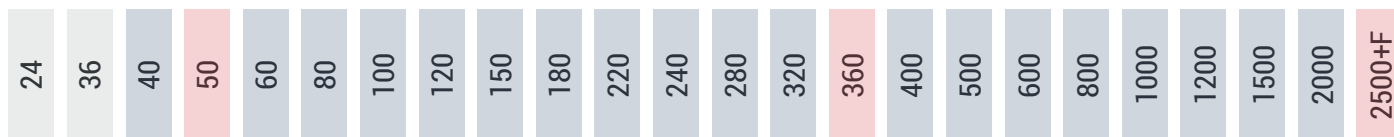

AVAILABILITY

Jumbo roll: Plain, Velcro, PSA

Printing: Napoleon, Neutral - Private label on MOQ

PRODUCT APPLICATIONS

Best use:

Composite Industry: carbon fibers, polyurethanes, poliesters, acrylic resins

Automotive: putty, primer and clear coats sanding

Marine: Gel Coat sanding

Wood Industry: raw woods, veneered woods, MDF, polyester paints, acrylic and poly-acrylic, water and solvent-based paints

Metal: Aluminum and Stainless steel sanding